



Plug & Cable Assembly w/Sculcon Series Junction Box

For Safe and Reliable Rack to Vehicle Connection



*Sculcon Junction Box
with Cable Assembly*

DESCRIPTION

Scully plugs are made of heavy duty molded polyurethane with stainless steel contacts. The fuel resistant cables are available in 30' coiled or 20' straight styles. Scully plugs and cables are the product of years of industry experience and offer durable, efficient operation. They are designed for use only with the intrinsically safe output circuits of Scully loading rack control monitors.

Scully Plugs and Cables are used to connect the Scully loading rack control monitor to the vehicle mounted socket. The plugs and cables are the pathway for the control unit/sensor signals which monitor the status of overfill prevention, electro-static grounding and vehicle identification during loading operations.

FEATURES AND BENEFITS


- Extremely rugged design which can withstand harsh environments and mishandling.
- Non-removable socket locator pins fitted directly into the plug housing.
- Permanent socket locator pins that won't loosen or back out.
- Internal cable retention clamp to prevent cable pull-out or twisting.
- Molded glass-reinforced, polycarbonate contact block with positive locator keyways for easy disassembly and/or reassembly.
- Molded arrow on plug housing for easy visual alignment with socket.
- Stainless steel electrical contact, spring loaded to insure proper contact with the truck socket pins.
- Virtually indestructible polyurethane plug shell, color coded to match Scully truck sockets.
- Compression strain relief spring prevents the cable from bending or crimping.
- Heavy-duty petroleum resistant cable with higher visibility and cold weather flexibility.



Plug and Cable Assemblies



For Safe and Reliable Rack to Vehicle Connection

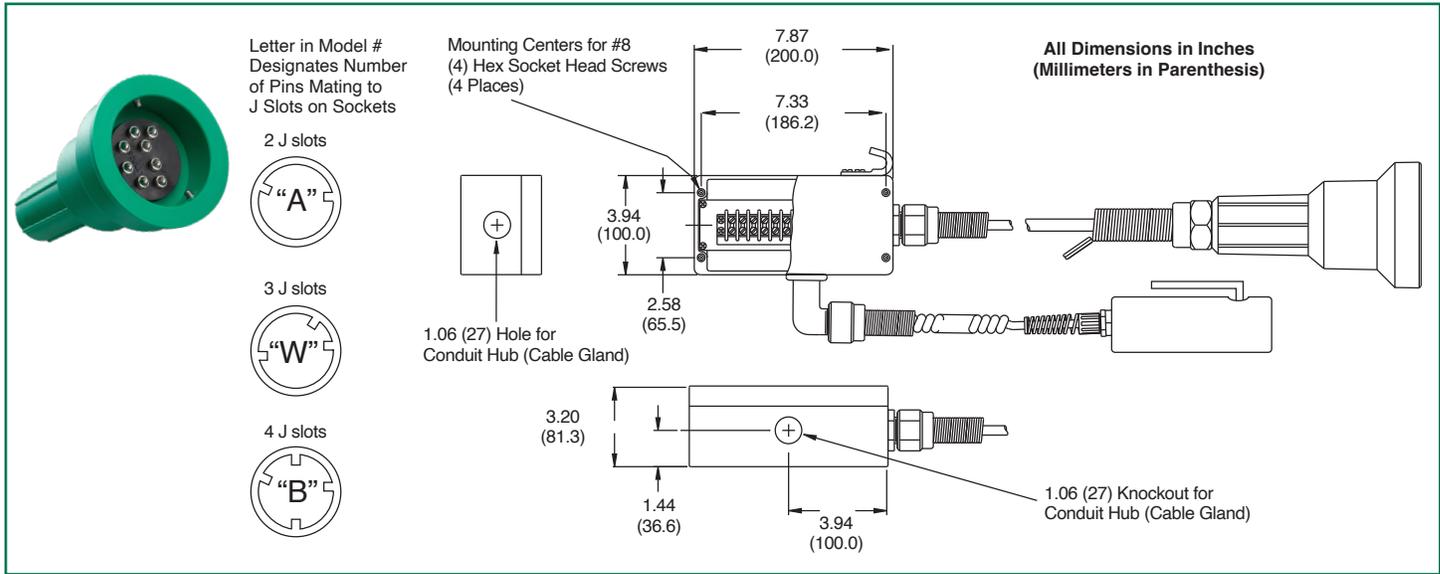

TECHNICAL SPECIFICATIONS

Environmental Temperature: -40°F to +140°F (-40°C to +60°C)
10 Conductor Cable: White: 16 Gauge
 All Other: 18 Gauge

Straight: 20 feet (6m)
 Coiled: 30 feet (9m)

Materials:

Plug Body:	Polyurethane
Insulator:	Polycarbonate
Contact Pins:	Stainless Steel
Junction Box:	Aluminum

Approvals: Compatible with intrinsically safe systems.

The cables working length is enclosed in a fuel-resistant jacket. The cable is oil and gas resistant. Other lengths are available upon request.

ORDERING INFORMATION

Sculcon Model	Applicable Controllers	Plug Style	# of Pins/Slots in Mating Area	Plug and Coiled Cable	Plug and Straight Cable	Coiled Cable w/J.Box	Straight Cable w/J.Box
SC-6A	Intellitrol, ST-15	Green	8 pins, 2 J slots ¹	21818	20830	08156	07582
SC-6A/D	Intellitrol, ST-15	Green	8 pins, 2 J slots	—	—	08248	—
SC-6W	Intellitrol, ST-35, ST-35C	Blue	6 pins, 3 J slots ²	21831	21764	08159	08139
SC-6W/D	Intellitrol, ST-35	Blue	6 pins, 3 J slots	—	—	08674	—
SC-6AO	Intellitrol, ST-35	Blue	6 pins, 2 J slots	21821	21820	08161	08160
SC-6OB	Intellitrol, ST-35	Blue	6 pins, 4 J slots	—	—	08689	—
SC-8A	Intellitrol	Green	10 pins, 2 J slots	31092	20831	08729	07581
SC-8B	Intellitrol, ST-15	Green	10 pins, 4 J slots ¹	31494	32679	—	—
SC-6	Intellitrol, ST-35	SAE J560-metal	—	20403	31107	07628	08603

Sculcon Junction Box for General Purpose Part #32319

WOGA: Western States Petroleum Association; API: American Petroleum Institute. 1-API RP1004 Thermistor Standard, 2-API RP1004 WOGA Optic Standard.

Copyright © 2022 Scully Signal Company. Dynacheck, Dynamic Self-Checking, Dynamic Self-Testing, Faylsafe, IntelliCheck, Intellitrol are registered trademarks of Scully Signal Company. All Rights Reserved. Specifications are subject to change without notice.

01-4
May 2022



Scully Signal Company
 70 Industrial Way
 Wilmington, MA 01887, USA
 800 272 8559 • sales@scully.com

Scully Systems Europe NV
 Maanstraat 25
 2800 Mechelen, Belgium
 +32 (0) 15 56 00 70 • info@scully.be

Scully UK Ltd
 Meridian House, Unit 33
 37 Road One Winsford Industrial Estate,
 Winsford Cheshire CW7 3QG, UK
 +44 (0) 1606 553805 • sales@scullyuk.com

